



# Distance Stop Block


SQUARE TYPE

CAD FILE


SDBH  
SDBN

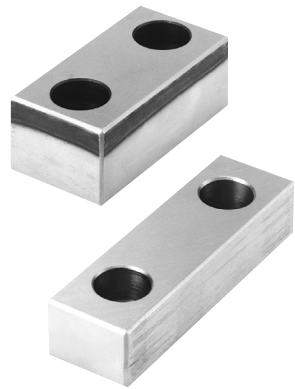

SDBH (Hardened Type)



SDBN



Material : S45C  
Area to be induction hardened (Hatched Area)  
HRC55 to 60

H	L1	Catalog No.	W	L	T	Safety color			
6	30	SDBH SDBN	30	60	20	R(Red) Y(Yellow) N(None)			
	50			80					
	70			100					
15	30			60					
	50			80	30				
	70			100					
6	50		SDBH SDBN	40	80		20	R(Red) Y(Yellow) N(None)	
	70				100				
	50				80				30
15	50	100							
	70	80			30				
	70	100							
6	50	SDBH		50	80	20	R(Red) Y(Yellow) N(None)		
	70				100				
	50				80				30
15	50				100				
	70				80	30			
	70				100	50			
20	80		SDBH	75	60	30		R(Red) Y(Yellow) N(None)	
	100				70				140
	75				125				50

Order   -  -  -   
SDBH 30 - 80 - 20 - R

Option Code	Specification
TG	When the same height is required, simultaneous grinding is carried out. Variation of dimension T is within +0.05~0.



Order

Copyright © Sankyo Oilless Industry, Inc. All Rights Reserved.

# For Distance Block Shim Plate

SQUARE TYPE

SDBS

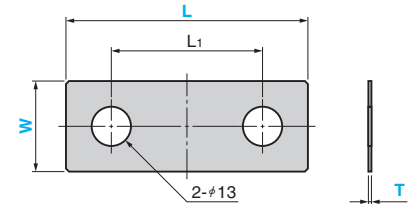

T	Tolerance
0.05	±0.01
0.1 0.2	±0.02
0.3 0.5	

Material : SUS304

L1	Catalog No.	W	L	T
30			60	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
50		30	80	0.1
				0.2
				0.3
				0.5
				0.05
				0.1
70	SDBS		100	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
50			80	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
70		40	100	0.3
				0.5
				0.05
				0.1
				0.2
				0.3

Order   -  -   
SDBS 40 - 80 - 0.1

The order unit is one piece.

L1	Catalog No.	W	L	T
50			80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
70			100	0.1
				0.2
				0.3
				0.5
				0.05
				0.1
80	SDBS	60	120	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
100		70	140	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
75		75	125	0.2
				0.3
				0.5
				0.05
				0.1
				0.2