




UWP
UWPC(4-C chamfering Type)

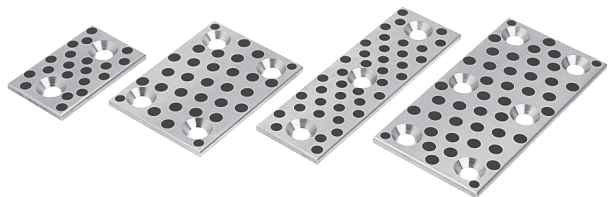


● W = 18 to 38, L = 50 to 100
W = 48, L = 75 to 125




● W = 75, L = 75 to 125
W = 100, L = 100 and 125



● W = 18 to 48, L = 150




● W = 75 and 100, L = 150

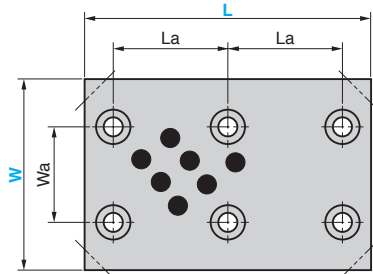


⚠ When tapped holes for mounting are drilled on the mating part, chamfer corners as shown below.

● Flat Head Bolt



● Sliding Direction



Material : Bronze with Graphite (SO#50 SP2)
Accessory : Flat Head Bolt

Wa	La	d	h	Mounting Bolt	Catalog No.	W	L
-	20	6.5	1.5	M6		18	50
	45						75
	70						100
-	60						150
	20						50
	45						75
-	70					28	100
	60						150
	20						50
-	45					38	75
	70						100
	60						150
-	45				UWP UWPC		75
	70						100
	60						150
-	70	10	0.8	M8		48	100
	95						125
	60						150
45	45						75
	70						100
	95						125
70	60						150
	70						100
	95						125
70	60					100	100
	95						125
	60						150




Order

Catalog No.	W	-	L
UWP	75	-	150
UWPC	48	-	100

UWP 75 - 150
UWPC 48 - 100

● UWPC 4-C chamfering specification

W	Size of chamfering
28	10
38	13
48	
75	17
100	



■ We are ready to accept requests or orders for special parts.

Copyright © Sankyo Oilless Industry, Inc. All Rights Reserved.