


Guide Post

FOR HOLDER TYPE GUIDE POST SET

CAD
FILE

NGP (For Plain and Oilless Type) $\phi 25$ to $\phi 80$

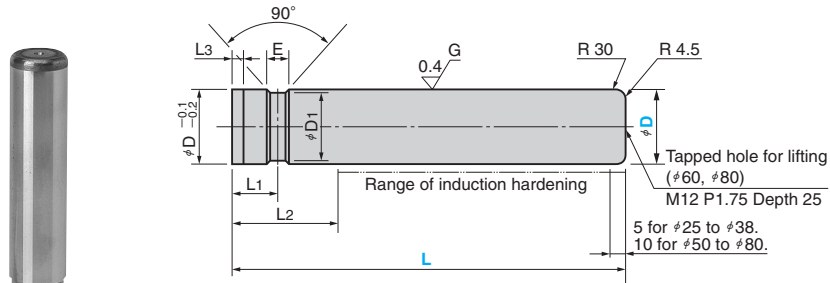

Material : S45C
Hardness : HRC55 to 60

D	D ₁	L ₁	L ₂	L ₃	E
25	$\begin{matrix} +0.024 \\ +0.015 \end{matrix}$	22	15	35	8
32		29	20	45	
38	$\begin{matrix} +0.026 \\ +0.017 \end{matrix}$	35	25	55	5
50		46	32.5	70	
60	$\begin{matrix} +0.033 \\ +0.020 \end{matrix}$	56	37.5	80	12
80		76	50	110	

Catalog No.	D	L													
		80	90	100	110	120	130	140	150	160	170	180	200		
	25	80	90	100	110	120	130	140	150	160	170	180	200		
	32	100	110	120	130	140	150	160	170	180	200	220	250		
NGP	38	100	110	120	130	140	150	160	170	180	200	220	250	280	300
	50	160	170	180	200	220	250	280	300	350					
	60	180	200	220	250	280	300	350	400						
	80	250	280	300	350	400	450								



Order

Catalog No.	D	-	L
NGP	38	-	160



Option


Option Code	Specification
MP	Tapped Hole for Securing. (Please see below drawing).



Order

NGP 38 - 160 - MP

• Specification MP



D	M
25	8
32·38	10
50·60	12
80	16